



The Heart of Your Pool System

Jandy® Stealth™ pump is a professional-grade singlespeed pump that provides superior performance and energy-saving efficiency. The Stealth pump is designed for ease of installation and trouble-free maintenance, and is our most efficient single-speed pump available.

• High Performance

Single-speed and 3-Phase models available

• Low Maintenance

The largest smooth surface trap basket on the market for reduced maintenance

User-Friendly

Includes ergonomic handles and easy to read indicators

• Less Noise

"Quiet Technology" design for whisper-soft operation

· Easy to Install

Comes equipped with 2"x 2 1/2" quick-connect unions (2 1/2"x 3"unions on 3.0HP and 5.0HP models)


Commercial Applications

Single-Phase and Three-Phase models available for commercial applications. Model SHPF5.0-3PH features a Totally Enclosed, Fan-Cooled (TEFC) motor design



Model SHPF5.0-3PH with TEFC motor

DIMENSIONS

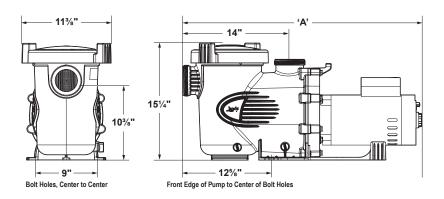

CANADIAN PUMP SPECIFICATIONS

Residential Stealth Pumps


Model Number	THP	WEF	Voltage	Amps	Pipe Size	Weight	Length A
SHPM1.0CND	1.25	-	208-230/115	5.4-5.2/10.3	2"-2 1/2"	43 lbs.	29 3/4"
SHPM1.5CND	1.65	-	208-230/115	7.6-7.2/14.4	2"-2 1/2"	45 lbs.	30"
SHPF3.0CND	3.45	-	208-230	14.8-13.5	3"	62 lbs.	31"

Commercial 3-Phase Stealth Pumps

THP	WEF	Voltage	Amps	Recommended Pipe Size	Weight	Length A
1.65	2.7	208-230/460	5.0-4.6/2.3	2"-2 1/2"	55 lbs.	29 3/4"
2.21	2.6	208-230/460	6.4-5.8/2.9	2"-2 1/2"	57 lbs.	30"
2.60	2.5	208-230/460	7.1-6.8/3.4	2"-2 1/2"	64 lbs.	30 1/2"
3.45	2.1	208-230/460	9.0-8.6/4.3	2 1/2"-3"	62 lbs.	31 1/2"
5.75	1.8	208-230/460	15.5-15.0/7.5	4"	95 lbs.	35"
	1.65 2.21 2.60 3.45	1.65 2.7 2.21 2.6 2.60 2.5 3.45 2.1	1.65 2.7 208-230/460 2.21 2.6 208-230/460 2.60 2.5 208-230/460 3.45 2.1 208-230/460	1.65 2.7 208-230/460 5.0-4.6/2.3 2.21 2.6 208-230/460 6.4-5.8/2.9 2.60 2.5 208-230/460 7.1-6.8/3.4 3.45 2.1 208-230/460 9.0-8.6/4.3	THP WEF Voltage Amps Pipe Size 1.65 2.7 208-230/460 5.0-4.6/2.3 2"-2 1/2" 2.21 2.6 208-230/460 6.4-5.8/2.9 2"-2 1/2" 2.60 2.5 208-230/460 7.1-6.8/3.4 2"-2 1/2" 3.45 2.1 208-230/460 9.0-8.6/4.3 2 1/2"-3"	1.65 2.7 208-230/460 5.0-4.6/2.3 2"-21/2" 55 lbs. 2.21 2.6 208-230/460 6.4-5.8/2.9 2"-2 1/2" 57 lbs. 2.60 2.5 208-230/460 7.1-6.8/3.4 2"-2 1/2" 64 lbs. 3.45 2.1 208-230/460 9.0-8.6/4.3 2 1/2"-3" 62 lbs.

¹ Model SHPF5.0-3PH features a Totally Enclosed, Fan-Cooled (TEFC) motor design.

PERFORMANCE

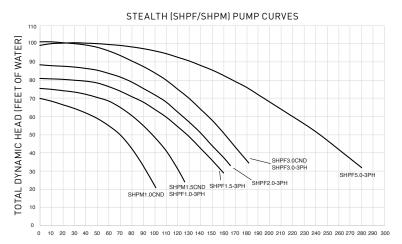

FLOW RATE - GALLONS PER MINUTE (GPM)



