

Jandy

# SUPERIOR POWER. SUPERIOR PERFORMANCE.





## Save on energy costs and do more with a single pump.

Our smallest pump series packs a powerful punch while accommodating large pools and spas. Boasting 12%<sup>1</sup> greater hydraulic performance than other pumps in its class, the Jandy VS FloPro<sup>™</sup> 3.8 HP pump effortlessly powers multiple features.

 Drop-In Replacement up to 3.95 Horsepower Included adjustable base allows for exact alignment

with critical plumbing dimensions for easy aftermarket replacement of popular Pentair® and Hayward® singlespeed and variable-speed pumps up to 3.95 horsepower.

#### • Powerful Performance

The all-new VS FloPro 3.8 HP pump generates higher head pressure and flow rates to accommodate large pool and spa designs with features such as waterfalls, spa jets, in-floor cleaning and solar heating systems.

#### • Fast, Simple Setup

The optional preinstalled SpeedSet<sup>™</sup> Controller makes pump setup, programming and maintenance a breeze.

#### • Two Programmable Auxiliary Relays

Two programmable<sup>2</sup> auxiliary relays can be used to control other pool equipment, such as a booster pump and salt chlorinator, for easier installation and operation. No need for additional timeclocks!





#### Choose Your Own Controller

Designed to work with the following Jandy control systems for complete programmability and customization:

- > SpeedSet Controller (included and preinstalled from factory on all 2AS models)
- > iQPUMP01 with iAquaLink® App Control
- Jandy AquaLink<sup>®</sup> Automation Systems
- > JEP-R Controller

#### Additional Features

- > Zero Clearance TEFC Motor for cool, quiet operation in tight spaces
- > 2" unions included or utilize 2" internal threads
- > Easy Controller Setup auto detects connection to an automation system or a traditional controller, eliminating the need to adjust settings manually
- RS485 Quick Connect Port for faster > installation and maintenance
- > Four-Speed Dry Contact Relay Control
- Tool-free lid for easy debris removal
- > Ergonomic easy-transport handle

### A Fluidra Brand | Jandy.com | 1.800.822.7933

©2023 Zodiac Pool Systems LLC. All rights reserved. ZODIAC® is a registered trademark of Zodiac International, S.A.S.U., used under license. All other trademarks are the property of their respective owners. 70998 SL

MODELS				
MUDELS		D E	I C	
	MU	DE	LЭ.	

Model No.	Option Description
VSFHP3802AS	VS FloPro 3.8 HP, SpeedSet Controller Preinstalled
VSFHP3802A	VS FloPro 3.8 HP, Controller Sold Separately


SPECIFICATIONS

Model No.	THP	WEF <sup>3</sup>	Voltage	Max Watts	Amps	Union Size	Rec. Pipe Size4		Overall Length
VSFHP3802A(S)	3.80	6.0	230 VAC	3,250W	16.0	2"	2" - 3"	53 lbs.	24 1/2"

#### ADJUSTABLE BASE CONFIGURATIONS<sup>5</sup>


Base	Fits	'A' Dimension	'B' Dimension
No Base	Hayward® Super Pump®, Pentair® SuperFlo®, Sta-Rite® SuperMax®	7-3/4"	12-3/4"
Small Base	Hayward Super II™, Jandy® PlusHP and MaxHP Pumps	8-7/8"	13-7/8"
Small Base w/ Spacers	Pentair WhisperFlo® and IntelliFlo® VSF, Sta-Rite Dyna-Glas™	9-1/8"	14-1/8"
Small Base + Large Base	Sta-Rite Max-E-Pro®, Sta-Rite Dura-Glas®, Sta-Rite Dura-Glas II, Sta-Rite Max-E-Glas®	10-3/4"	15-3/4"

#### DIMENSIONS

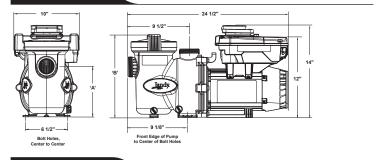

#### PERFORMANCE

#### VSFHP3802A(S) Performance Curves

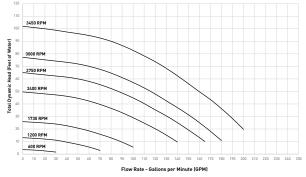

<sup>1</sup>Hydraulic Horsepower of Jandy VS FloPro 3.8 compared to Pentair IntelliFlo VSF as measured on system curve C at 3450 RPM. <sup>2</sup>Auxiliary relays on all Jandy 2A and 2AS pump models are programmable when paired with a

\*Auxiliary relays on all Jandy ZA and ZAS pump models are programmatic when paired with a Jandy Speedstor idPUMPMOI variable-speed pump controller.
\*WEF weighted energy factor in kga/LWM. WEF is a performance-based metric adopted by the Department of Energy to characterize the energy performance of dedicated-purpose pool pumps. Department of Energy to CHR Parts 429 and 431.
\*Auxily follow local building and safety codes for pipe sizing and guidelines.
\*Small base with spacers included with all FloPro pumps. Large base is optional part R0564600.

