

ePUMP 3.8 HP  
2-AUX RELAY VS PUMP



Jandy®

# EXCEPTIONAL PERFORMANCE FOR EXCEPTIONAL POOLS



TRADE SERIES  
EXCLUSIVE

**ePUMP™**  
VARIABLE-SPEED PUMP

## Elevating ePump™ to the next level.

High-end pools require powerful pumps. With 24% more hydraulic performance than our 2.7 HP ePump model, the Jandy® ePump 3.8 HP is a low-maintenance, variable-speed pool pump supporting a wide range of applications.

- **Power All Your Features**

With excellent hydraulic performance, the applications are endless. From filtration to negative edges and everything in between—waterfalls, water features and spa jets.

- **Fast, Simple Setup**

Quick and intuitive, the optional SpeedSet™ Controllor allows you to quickly set up and program the ePump, making installation and maintenance a breeze.

- **Better Performance**

Small pump baskets fill faster — restricting flow and eroding performance. The ePump helps reduce maintenance and improve performance with the largest-capacity, smooth-surface basket in the industry.

- **Two Programmable Auxiliary Relays**

Two programmable<sup>1</sup> auxiliary relays with safety-interlock control other pool equipment, like booster pumps and salt chlorinators, without added timeclocks.

- **Automation Ready**

Take control of your pump with iQPUMP01 or a Jandy Aqualink® Automation system and control it all with the iAquaLink® app for simplified pool operation.

- **Additional Features**

- › RS485 Quick Connect Port for faster installation and maintenance
- › Four-Speed Dry Contact Relay Control
- › Easy controller setup auto detects connection to an automation system or a traditional controller, eliminating the need to adjust settings manually
- › 2.5" x 3" Unions Included
- › Ergonomic carry handle for easy installation
- › Tool free lid allows for quick and easy cleaning of the pump basket
- › Zero Clearance Totally Enclosed Fan-Cooled (TEFC) permanent magnet brushless DC motor that provides cooler operation and extended motor life

- **Choose Your Own Controller**

Designed to work with the following Jandy control systems for complete programmability and customization:

- › SpeedSet™ Controllor (included and preinstalled from factory on all 2AS models)
- › iQPUMP01 with iAquaLink App Control
- › Jandy Aqualink Automation Systems
- › JEP-R Controllor


## MODELS

Model No.	Option Description
VSSH3802AS	ePump 3.8 HP, SpeedSet Controllor Preinstalled
VSSH3802A	ePump 3.8 HP, Controllor Sold Separately


## SPECIFICATIONS

Model No.	THP	WEF <sup>2</sup>	Voltage	Max Watts	Amps	Union Size	Rec. Pipe Size <sup>3</sup>	Carton Weight	Overall Length
VSSH3802A(S)	3.80	6.5	230 VAC	3,120W	16.0	2.5" x 3"	2.5" - 3"	71 lbs.	30 1/8"

## DIMENSIONS

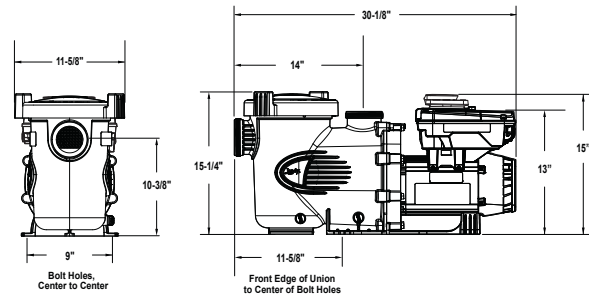

## PERFORMANCE

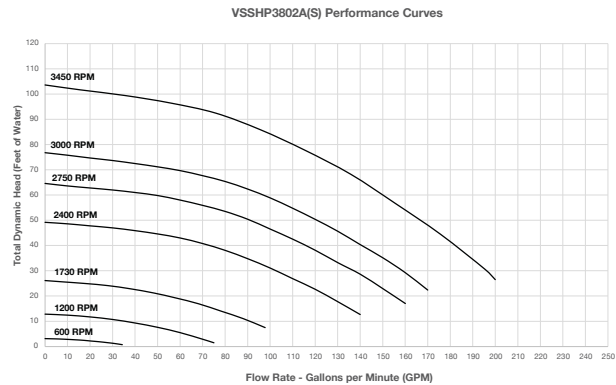

<sup>1</sup>Auxiliary relays on all Jandy 2A and 2AS pump models are programmable when paired with a Jandy SpeedSet or iQPUMP01 variable-speed pump controller.

<sup>2</sup>WEF = weighted energy factor in kgal/kWh. WEF is a performance-based metric adopted by the Department of Energy to characterize the energy performance of dedicated-purpose pool pumps. Department of Energy 10 CFR Parts 429 and 431.

<sup>3</sup>Always follow local building and safety codes for pipe sizing and guidelines.